



# HS 2

Quick Guide | Kurzanleitung | Guide de démarrage rapide | Guida rapida | Instrucciones resumidas | Instruções resumidas | Beknopte gebruiksaanwijzing | Krótka instrukcja obsługi | Snabbguide | Kort vejledning | Pikaohje | Γρήγορος οδηγός | Kısa Kılavuz | Краткая инструкция | 快速指南 | 快速使用指南 | クイックガイド | 요약 설명서

**In the box**

Frequency caps  
MZC 2-1 MZC 2-2

Quick Guide Safety Guide

Headband

3.5 mm jack plug or 3-Pin connector

**Adjusting**

slightly bend

slightly bend

**Headband**

click!

**Setup**

3.5 mm jack plug 3-Pin connector

\*not included

**Use**

2-3 cm

Sennheiser electronic SE & Co. KG

## Accessories

### Frequency cap

short cap:  
MZC 2-1



+ 2 dB

long cap:  
MZC 2-2



+ 4 dB

or




### Windshields

MZW 2\*



- 20 dB  
MZW 2\*


MZW 02\*



- 30 dB  
MZW 2\* + MZW 02\*

\*optional accessories


## Cleaning

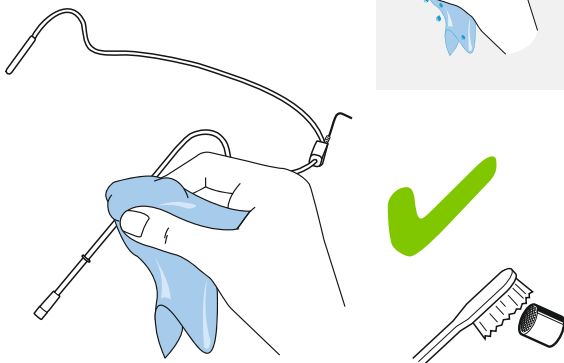

## Specifications

Pick-up pattern	omni-directional
Frequency response	20 - 20,000 Hz
Sensitivity in free field	5 mV/Pa $\pm$ 3 dB
Nominal impedance	1 k $\Omega$
Min. terminating impedance	4.7 k $\Omega$
Equivalent noise level:	
A-weighted	28 dB
CCIR-weighted	41 dB
Max. sound pressure level	140 dB
Power supply	7.5 V
Connector	3.5 mm jack   3-Pin
Cable length	1.6 m
Diameter of microphone	4.8 mm
Weight with headband	
3.5 mm jack	30.1 g
3-Pin	28.9 g

## Frequency response

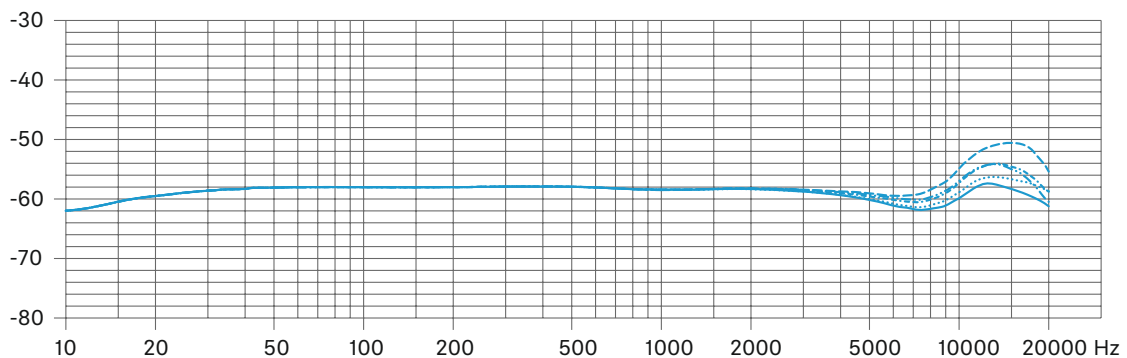

Frequency response curves of the microphone

Microphone placed in the corner of the mouth, distance to the mouth 3 cm

— capsule only

..... with MZC 2-1

----- with MZC 2-2

-.-.-.- with MZW 2

-.-.-.- with MZW 2 and MZW 02