



www.sennheiser.com/download

Sennheiser electronic SE & Co. KG

Am Labor 1, 30900 Wedemark, Germany
www.sennheiser.com

Printed in Germany
Publ. 03/25, 581329/A07




e 835/e 835-S/ e 835-S-PTT

Quick Guide
Kurzanleitung
Guide rapide
Guida rapida
Guía de inicio rápido
Guia rápido
Beknopte handleiding
Krótka instrukcja obsługi
Snabbguide

Kvikstartguide
Pikaohje
Γρήγορος οδηγός
Kısa Kılavuz
Краткая инструкция
快速指南
快速使用指南
クイックガイド
퀵 가이드


SENNHEISER

Setup

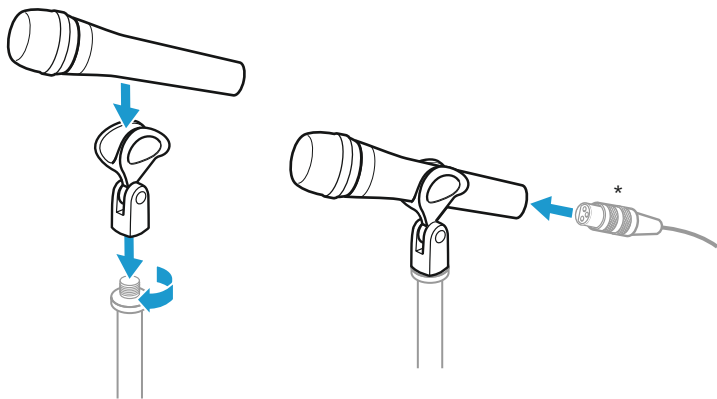


*XLR-3 cable not included



In the box

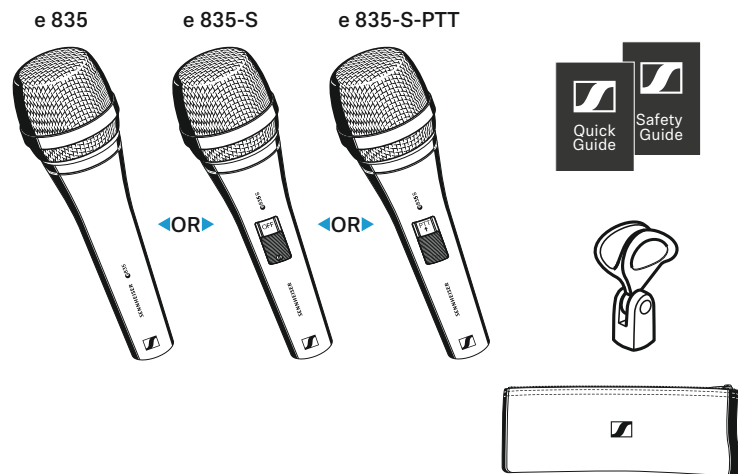

Overview

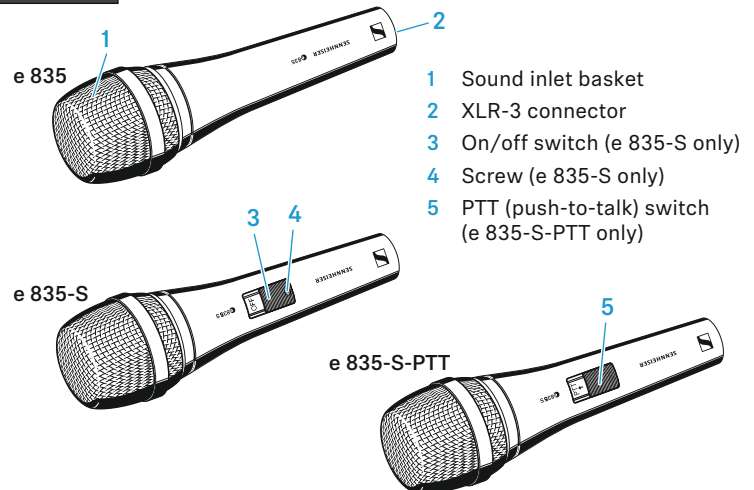


ON/OFF

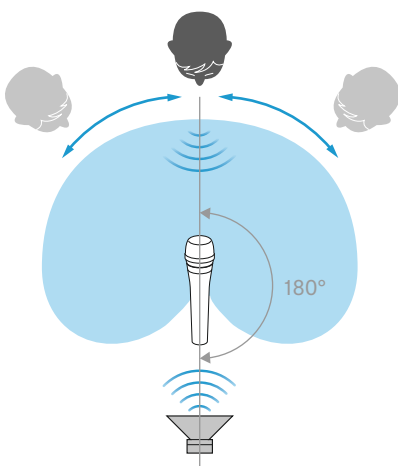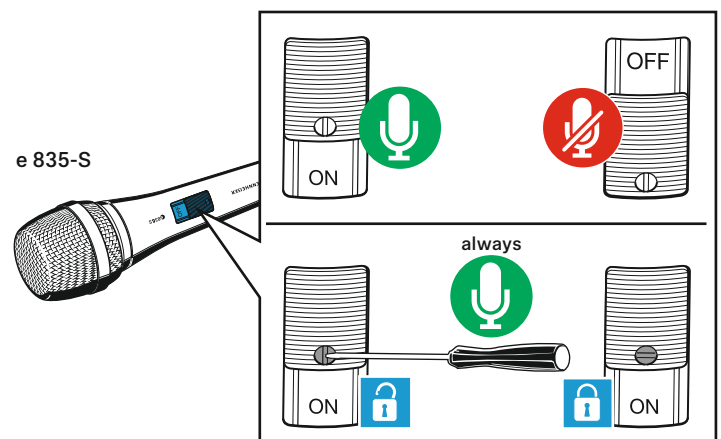


PTT switch

e 835-S-PTT






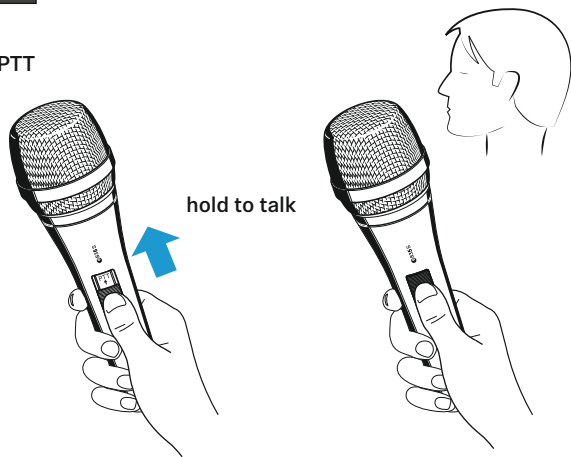


Accessory

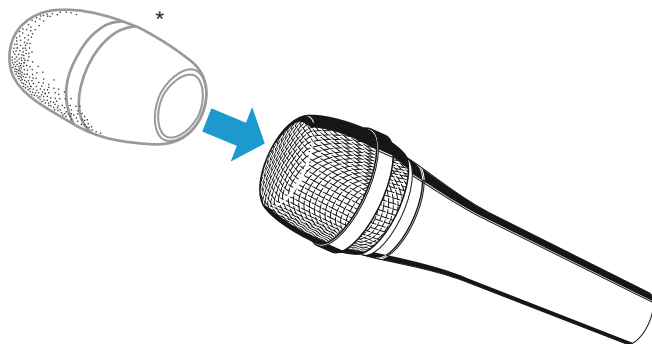

*MZW 4032 not included




Cleaning

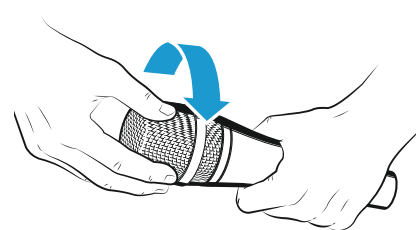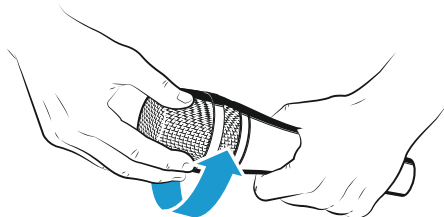


Specifications

Transducer principle	dynamic
Frequency response	40 - 16,000 Hz
Pick-up pattern	cardioid
Sensitivity (free field, at 1 kHz)	2.7 mV/Pa
Nominal impedance (at 1 kHz)	350 Ω
Min. terminating impedance	1 k Ω
Connector	XLR-3
Temperature range	0 °C to +40 °C
Dimensions	$\varnothing$ 48 x 180 mm
Weight	330 g

Connector assignment

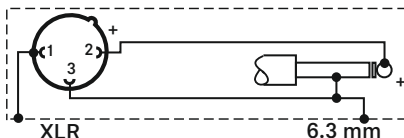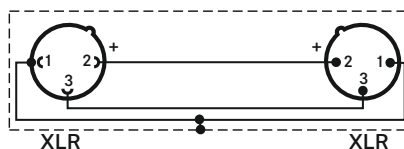

UNBALANCED

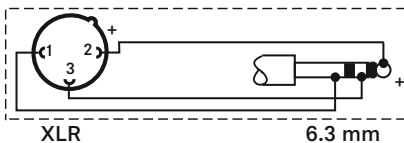

BALANCED

Polar pattern and frequency response

