



e 902



www.sennheiser.com/download

Quick Guide
Kurzanleitung
Guide rapide
Guida rapida
Guía de inicio rápido
Guia rápido
Beknopte handleiding
Krótka instrukcja obsługi
Snabbguide

Kvikstartguide
Pikaohje
Γρήγορος οδηγός
Kısa Kılavuz
Краткая инструкция
快速指南
快速使用指南
クイックガイド
퀵 가이드


Sennheiser electronic SE & Co. KG

Am Labor 1, 30900 Wedemark, Germany
www.sennheiser.com

Printed in Germany
Publ. 06/24, 581333/A05


SENNHEISER

Setup

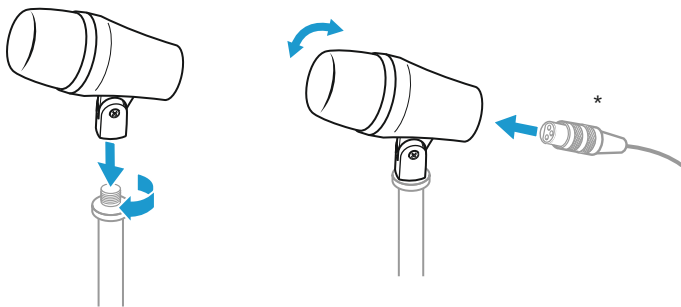



*XLR-3 cable not included

In the box






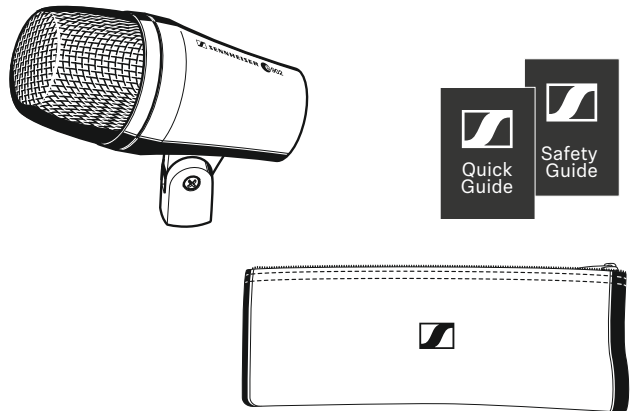


Overview

- 1 Sound inlet basket
- 2 XLR-3 connector
- 3 Integral stand mount

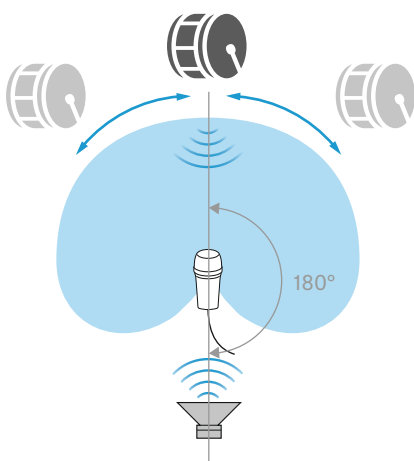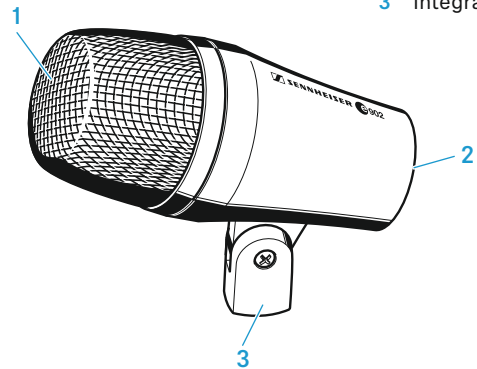


Cleaning

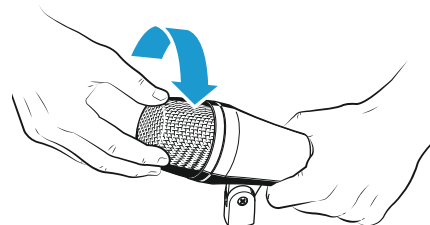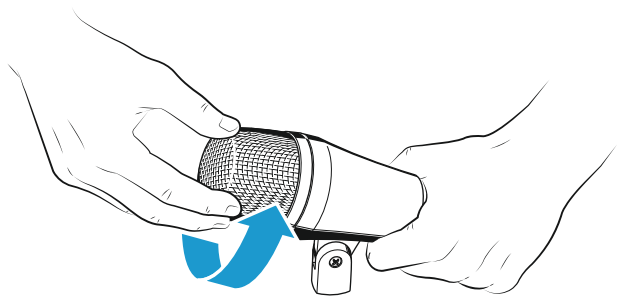

Specifications

Transducer principle	dynamic
Frequency response	20 - 18,000 Hz
Pick-up pattern	cardioid
Sensitivity (free field)	0.6 mV/Pa (at 60 Hz) 0.2 mV/Pa (at 1 kHz)
Nominal impedance (at 1 kHz)	350 Ω
Min. terminating impedance	1 kΩ
Connector	XLR-3
Dimensions	60 x 128.5 mm
Weight	440 g

Connector assignment

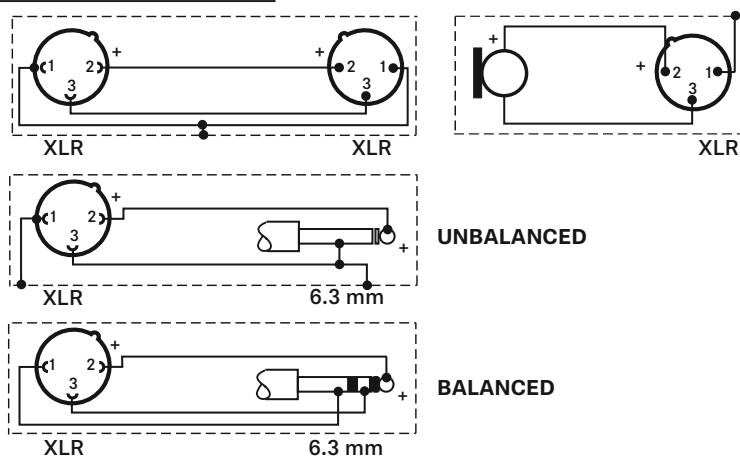

Polar pattern and frequency response

