



e 914



www.sennheiser.com/download

Sennheiser electronic SE & Co. KG

Am Labor 1, 30900 Wedemark, Germany
www.sennheiser.com


Printed in Germany
Publ. 04/25, 581337/A07

Quick Guide
Kurzanleitung
Guide rapide
Guida rapida
Guía de inicio rápido
Guía rápido
Beknopte handleiding
Krótka instrukcja obsługi
Snabbguide

Kvikstartguide
Pikaohje
Γρήγορος οδηγός
Kısa Kılavuz
Краткая инструкция
快速指南
快速使用指南
クイックガイド
퀵 가이드


SENNHEISER

Setup

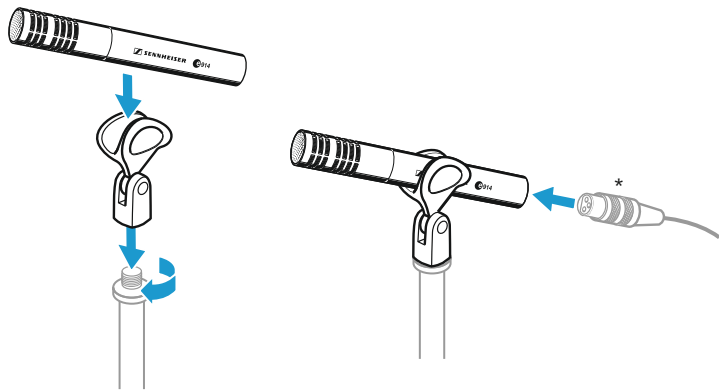


*XLR-3 cable not included

In the box

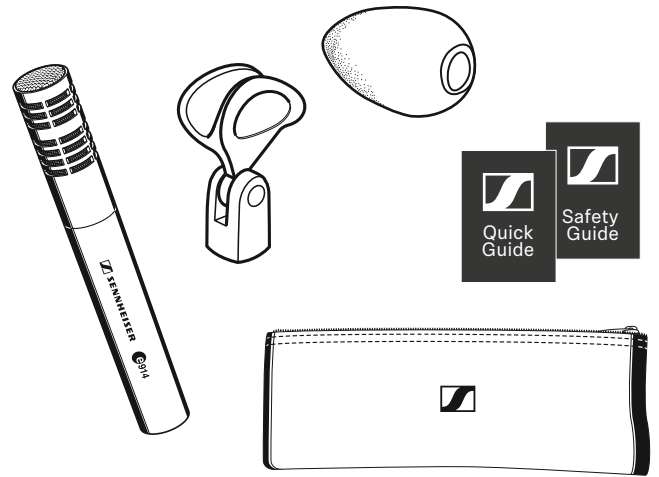


Overview


- 1 Sound inlet basket
- 2 XLR-3 connector
- 3 Adjusting
- 4 Adjusting the bass filter

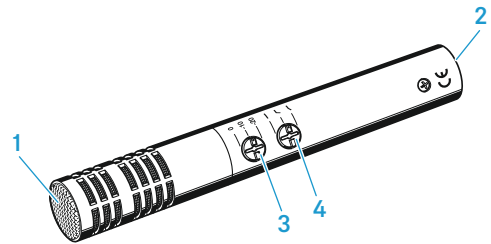


Adjusting

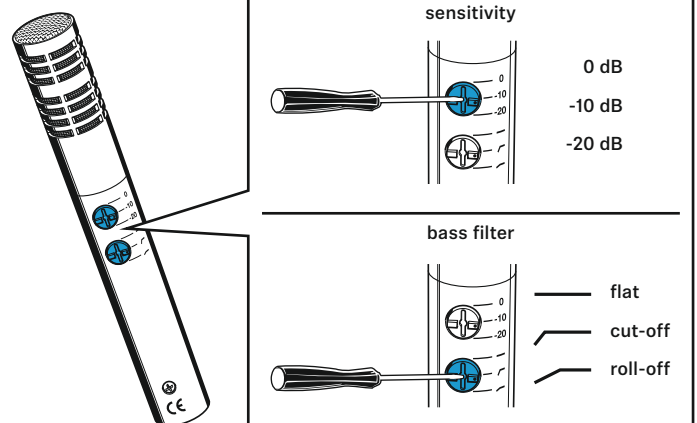


Using the windshield

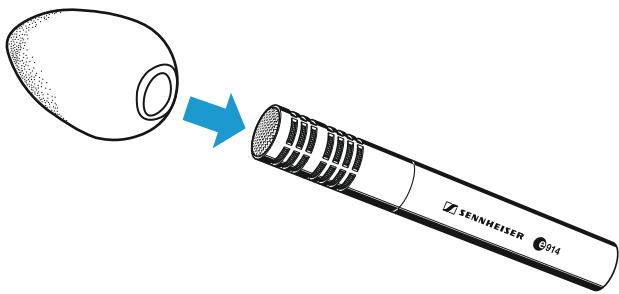

Cleaning

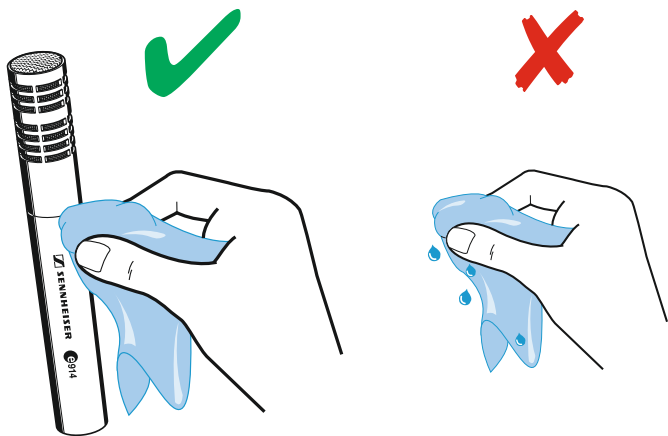

Connector assignment

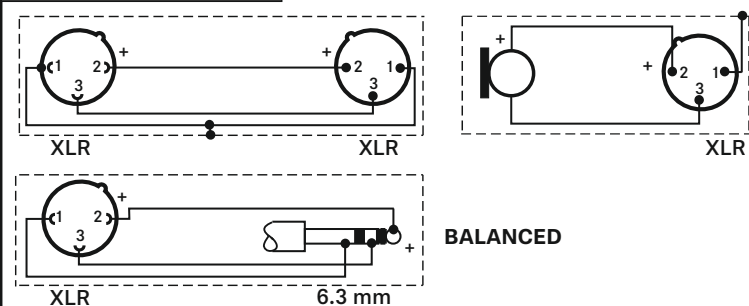

Specifications

Transducer principle	pre-polarized condenser microphone
Frequency response	20 - 20,000 Hz
Pick-up pattern	cardioid
Sensitivity (free field, at 1 kHz) with pre-attenuation	7 mV/Pa 2.3 mV/Pa / 0.7 mV/Pa
Nominal impedance (at 1 kHz)	100 Ω
Min. terminating impedance	1 k Ω
Max. sound pressure level (at 1 kHz)	137/147/157 dB SPL (depending on pre-attenuation)
Equivalent noise level	
A-weighted	24 dB
CCIR-weighted	34 dB
Pre-attenuation	0 dB, -10 dB, -20 dB

Bass filter	linear roll-off 130 Hz, 6 dB/oct. cut-off 85 Hz, 18 dB/oct.
Phantom powering	48 V / 2.2 mA
Connector	XLR-3
Dimensions	$\varnothing$ 24 x 157 mm
Weight	198 g

Polar pattern and frequency response

