



MZF 8000 II Filter module



Developed for the broadcast and film industries, the MZF 8000 II filter module effectively blocks interference caused by infrasound – such as low-frequency wind and handling noise – thus ensuring top-quality audio recordings with the MKH 8020 (omni-directional), MKH 8040 (cardioid) and MKH 8050 (super-cardioid) RF condenser microphones.

The high degree of flexibility provided by their modular design, the weather-proof microphone principle and the natural, warm sound of the microphone heads make the 8000 series unique – and the perfect choice for use in studios, for concerts, broadcasts and in the film industry.

SPECIFICATIONS

Low-cut filter	-3 dB @ 16 Hz, 18 dB/oct
Roll-off (switchable)	-3 dB @ 70 Hz
Attenuation (switchable)	-10 dB
Additional equivalent noise level	@ 0 dB: 1 dB(A)
	@ -10 dB: 4 dB(A)
Max. Input voltage	@ 0 dB: 14 dBV
	@ -10 dB: 9 dBV
Max. Output voltage	@ 0 dB: 14 dBV
	@ -10 dB: -1 dBV
Typ. Impedance	50 Ω
Min. Terminating impedance	2 kΩ
Phantom powering	48 V ± 4 V (P48, IEC 61938)
Dimensions	Ø 19 x 29 mm (0.75" x 1.14")
Weight	26 g (0.057 lbs)
Temperature range	-10 °C to +60 °C

FEATURES

- Switchable roll-off filter (-3 dB at 70 Hz)
- Fixed low-cut filter (-3 dB at 16 Hz)
- Excellent suppression of handling noise
- Extremely low inherent self-noise – complex acoustic details are reproduced exactly
- High-quality -10 dB pad protects against overmodulation
- Active filter with fully floating, balanced, low-impedance output
- Allows for easy connection to subsequent recording equipment and highly precise, natural sound reproduction
- Extremely compact design
- Module can be used with remote accessories

DELIVERY INCLUDES


- Filter module MZF 8000 II
- Instruction manual

PRODUCT INFORMATION

MZF 8000 II

Art. no. 700249

FREQUENCY RESPONSE

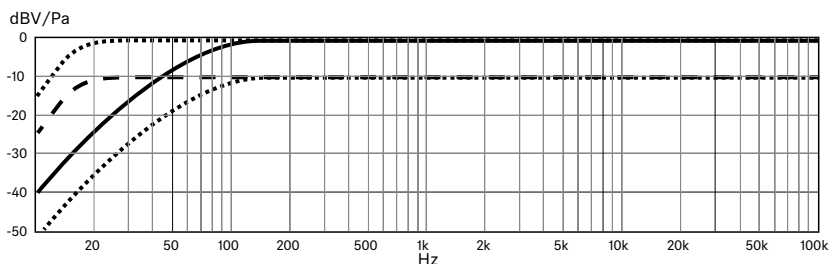

	Low Cut	10 dB Attenuation
	enabled	disabled
	disabled	enabled
	both switches disabled & enabled respectively	